


Almatec Type A 10 double diaphragm pumps

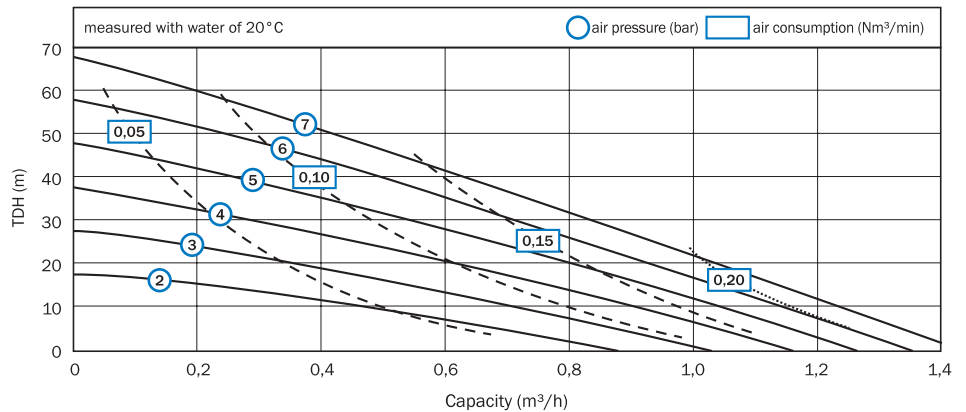

Technical details

type	A 10	
Nominal connection (NPT)	3/8"	
Air connection	R 1/8"	
Weight (kg)	PE	-
	PTFE	4
Max. particle size (mm)	3	
(with ball valves)		
Suction lift (dry, mwc)	cylindric valves	2
	ball valves	1,5
Suction lift (filled, mwc)	9	
Temperature (°C) (max.)	PE	-
	PTFE	100

materials	
housing	PTFE, PTFE-conductive,
diaphragms	PTFE, EPDM
balls	PTFE, EPDM, SS 316
valves	PTFE

article codes	
A . [size] . [No 2] . [No 3] . [No 4] - [No 5]	
[No 2] material of casing	
T = PTFE	
U = PTFE-conductive	
[No 3] material of diaphragm	
E = EPDM	
T = PTFE/EPDM-composite	
[No 4] type and material of valves	
E = Ball valves, EPDM	
T = Ball valves, PTFE	
S = Ball valves, stainless steel	
Z = Cylinder valves, PTFE	
[No 5] special equipment	
B = Barrier chamber system	
D = Diaphragm monitoring	

Dimensions

