


# VERDERAIR VA 25 metallic



Type VA 25

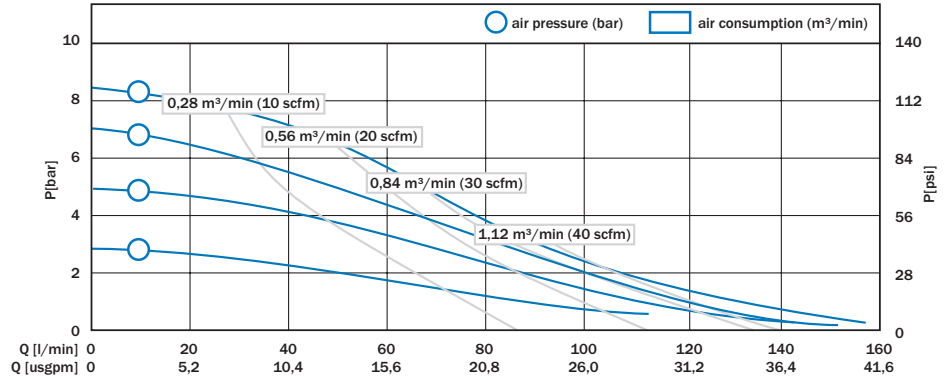

## Technical details

Technical details		
Weight [kg]	Aluminum	8.2
	Stainless Steel	15
Suction lift [mwc]	Dry	2.5
	Wet	5.5
Temperature [°C]	Aluminum	5-65*
	Stainless Steel	5-65*
* 93°C with Teflon diaphragms		
Max. particle size [mm]		3.2

Non wetted material	
Centre section	Epoxy coated Aluminum

Article codes	
VA 25 . [no.2] . [no.3] . [no.4] . [no.5]	
[no.2] material of casing	
AL	Aluminum
SS	Stainless Steel

[no.3] material of seat	
AC	Acetal
PP	Polypropylene
KY	Kynar
SS	Stainless Steel
HS	Hardened Steel
HY	Hytrell
SP	Santoprene
VT	Viton

[no.4] material of valve	
TF	Teflon
HS	Hardened Steel
HY	Hytrell
SP	Santoprene
BN	Buna N
VT	Viton
GE	Geolast
AC	Acetal
SS	Stainless Steel

[no.5] material of diaphragm	
TF	Teflon
HY	Hytrell
SP	Santoprene
BN	Buna N
VT	Viton
GE	Geolast

Dimensions Aluminum pumps	
A	319.5 mm
B	345.0 mm
C	367.8 mm

Dimensions SST pumps	
A	312.7 mm
B	338.1 mm
C	360.9 mm

## Dimensions



www.verder.com