


VERDERAIR VA 40 metallic



Type VA 40

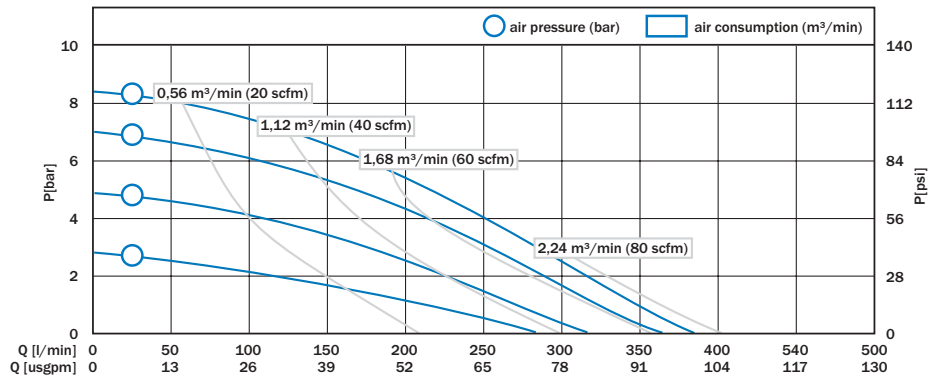

Technical details

Technical details		
Weight [kg]	Aluminum	15.2
	Stainless Steel	38.6
Suction lift [mwc]	Dry	2.5
	Wet	5.5
Temperature [°C]	Aluminum	5-65*
	Stainless Steel	5-65*
* 93 °C with Teflon diaphragms		
Max. particle size [mm]		4.8

Non wetted material	
Centre section	Epoxy coated Aluminum

Article codes	
VA 40 . [no.2] . [no.3] . [no.4] . [no.5]	
[no.2] material of casing	
	AL = Aluminum
	SS = Stainless Steel

Dimensions Aluminum pumps	
A	427 mm
B	465 mm
C	497 mm

Dimensions Stainless Steel pumps	
A	412.5 mm
B	451 mm
C	482.5 mm

[no.3] material of seat	
PP	Polypropylene
KY	Kynar
SS	Stainless Steel
HS	Hardened Steel
HY	Hytrel
SP	Santoprene
GE	Geolast
VT	Viton

[no.4] material of valve	
AC	Acetal
GE	Geolast
HS	Hardened Steel
HY	Hytrel
SP	Santoprene
TF	Teflon
VT	Viton

[no.5] material of diaphragm	
TF	Teflon
HY	Hytrel
SP	Santoprene
VT	Viton
GE	Geolast

